


FeatherEdge™ 248Vi

VPX 3U AI/ML Processor Module

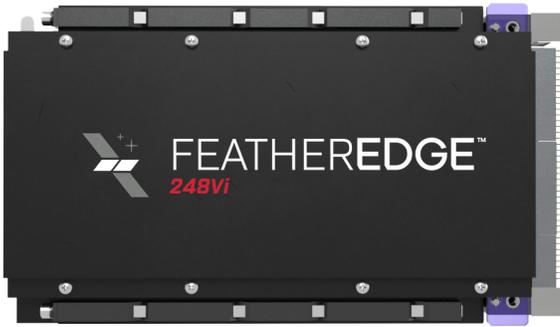

FeatherEdge™ 248Vi is a standalone modular 3U VPX Artificial Intelligence (AI) and Machine Learning (ML) processor designed for extreme environments and size-constrained applications.

FeatherEdge™ 248Vi is a part of the Fortis™ suite, which includes the following product line options:

- » Sidus Single Board Computer (SSBC)
- » Position, Navigation, and Timing (PNT)
- » Global Positioning System (GPS) Receiver
- » Custom Input/Output (I/O) Card
- » Power Converter Card
- » Software Defined Radio (SDR)

Key Features

- » **Designed for Autonomous and Mission-Critical Systems** - FeatherEdge™ 248Vi delivers reliable near real-time data processing, rapid decision-making, and system resilience in demanding operational environments
- » **Powered by NVIDIA® Jetson AGX Orin™ Industrial** - Provides high-performance compute capabilities for embedded edge applications, enabling advanced multi-sensor perception, situational awareness, and data fusion in a compact, power-efficient form
- » **Optimized for Size, Weight, Power and Cost (SWaP-C)** - Tailored for unmanned platforms, cognitive electronic warfare, and C5ISR operations across air, land, sea, and space
- » **Rugged SOSA® Aligned Design** - Industry standard form factor with enhanced environmental resilience for seamless system integration

Applications



Air

- » Aerial Drones
- » Ballistic Missiles
- » Commercial and Civil Aircraft




Sea

- » Submarines
- » Surface Ships
- » Underwater Drones




Land

- » Command and Control (C2) Network
- » Electronic Warfare (EW)
- » Intelligence, Surveillance, and Reconnaissance (ISR)
- » Unmanned Ground Vehicles (UGVs)

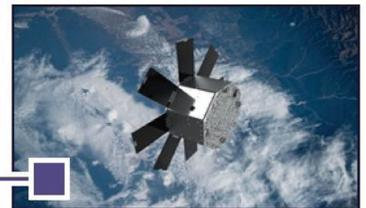

Space

- » Counterspace Operations
- » Satellites
- » Space Defense
- » Space Situational Awareness

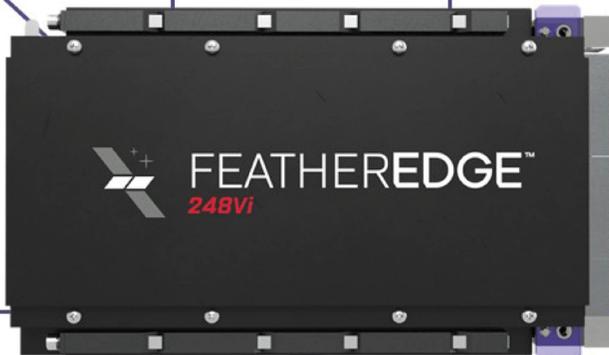

NASDAQ | SIDU
SIDUSPACE.COM
+1 (321) 450.5633

©2025 Sidus Space. All Rights Reserved.

Headquarters and Mission Control Center
150 N Sykes Creek Pkwy, STE 200
Merritt Island, Florida, USA 32953

Satellite Production and Manufacturing Facility
400 West Central Blvd,
Cape Canaveral, Florida, USA 32920



FeatherEdge™ 248Vi

VPX 3U AI/ML Processor Module



FeatherEdge™ 248Vi 3U Specifications

System Architecture	SoC	NVIDIA® Jetson AGX Orin™ Industrial
	Coprocessor	248 TOPS
	Microcontroller	Rad-tolerant ARM® Cortex® M7
	FPGA	PolarFire® SoC
	RAM	64 GB LPDDR5

Power	Input Power	12 VDC
	Power Consumption	<ul style="list-style-type: none"> » 15-25 W under typical load » Max 75 W when board is fully utilized

Mechanical	Dimensions	3U VPX Slot (100 mm x 160 mm)
	Weight	<1.5 kg

I/O	Gigabit Ethernet (GbE)	1
	10 Gigabit Ethernet (10GbE)	1
	USB 2.0	1
	USB 3.2	1
	RS422	1
	UART TTL	1
	PPS Input	1
	LVDS/SpaceWire	4
	CANbus	1
	PCIe®	1x PCIe® Gen4 x4

Memory Resources	User Flash	» 680 GB pSLC NVMe SSD (with ECC)
		» 64 GB eMMC 5.1

Environmental	Cooling Method		Conduction-cooled
	Operating Temp	Min.	-40° C
		Max.	+85° C
	Vibration (3 Axes)		0.024G / 25 Hz
	MIL-STD-810H		0.15G / 150 Hz
			0.15G / 1 kHz
	Random (Freq)		0.02G / 0-2 kHz
Sine (Freq)		10G / 0-500 Hz	
Shock (3 Axes)		20G / 5 mS	

Software	» Linux OS
	» TensorRT
	» PyTorch

Orbit Type	Terrestrial	LEO	GEO
Radiation Tolerance (TID)	N/A	25 krad	100 krad
Relative Humidity	0-95%	-	-
Part Selection	MIL-SPEC	Rad-tolerant	Rad-tolerant
SEU Rate	N/A	<2.00 × 10 ⁻³ NA	<6.00 × 10 ⁻³ NA



NASDAQ | SIDU
SIDUSSPACE.COM
+1 (321) 450.5633

©2025 Sidus Space. All Rights Reserved.

Headquarters and Mission Control Center
150 N Sykes Creek Pkwy, STE 200
Merritt Island, Florida, USA 32953

Satellite Production and Manufacturing Facility
400 West Central Blvd,
Cape Canaveral, Florida, USA 32920

